


HZDR-SS



HZDR-SS

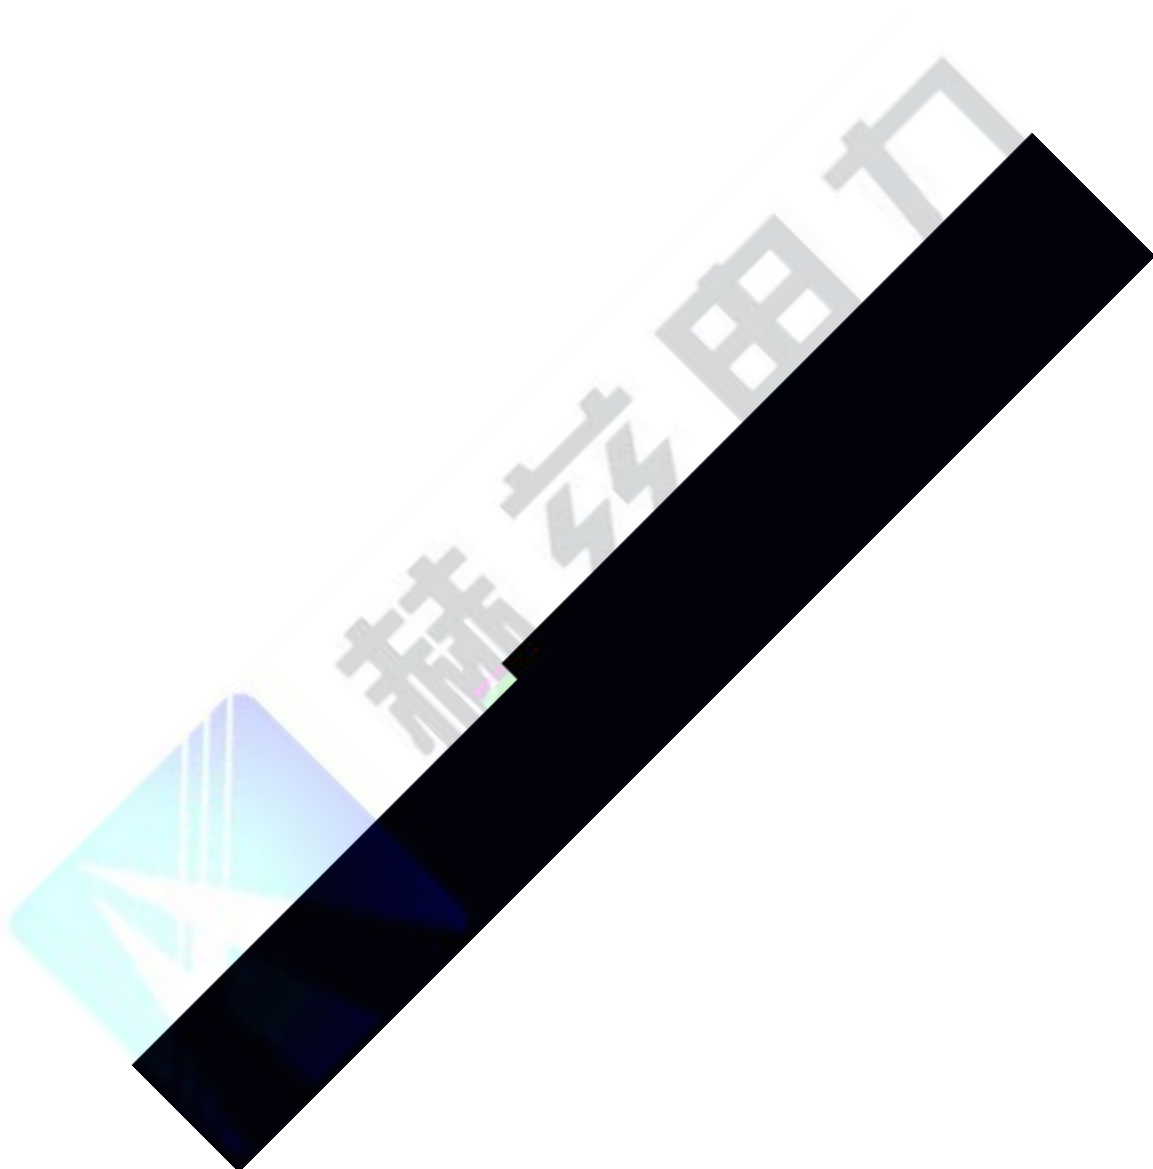

—

—

—



“

”

GB3983.2-1989
JB5346-1998

DL/T840-2003

-
-
-
-
-
-
-
-
-
-

；

7.0 1024 × 600

500

U

U



1 100V ± 10% 55Hz
 40V ± 10% 55Hz
 8V ± 10% 55Hz
 2V ± 10% 55Hz

2 :

 : 0.1uF 6000uF ± 1%+0.01uF

 : 50uH 20H ± (3%+0.05uH)

 : 5mA 2A ± (3%+0.05mA)


 : 20mΩ 20kΩ ± (3%+0.1mΩ)

3 5

4 425*335*210 mm

5 8KG


-20 40
≤ 85%RH

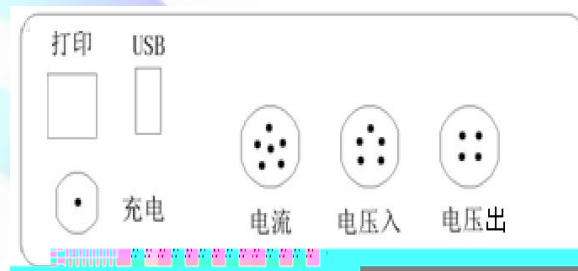





“ ”

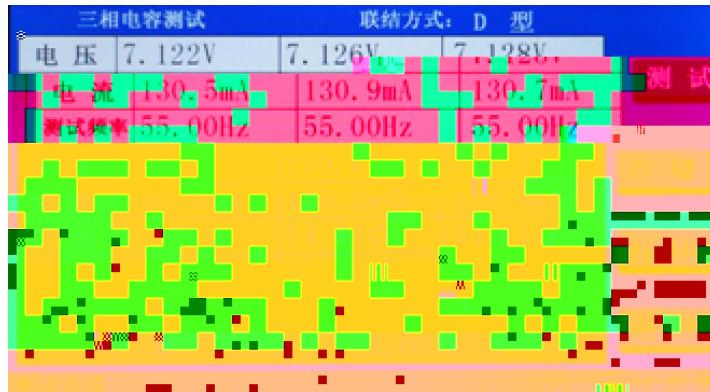

“ ”

CT

2



CT

“ ”



“ ” “ ”

3

名称：测试1		单相电容测试		外置电流钳	
额定频率：50Hz		额定电压：		10.000 kV	
电 压	4.160V	阻 抗	620.6mΩ		
电 流	114.9mA	容 抗	39.81Ω		
测试频率	55.00Hz	电 容	79.95uF		
角 度	269.0°	容 量	2.512MVar		

上一条

下一条

U盘存储

打印

返回

“ U ”

U

4

“ ”




“ ”

“ ”

“ ”

,

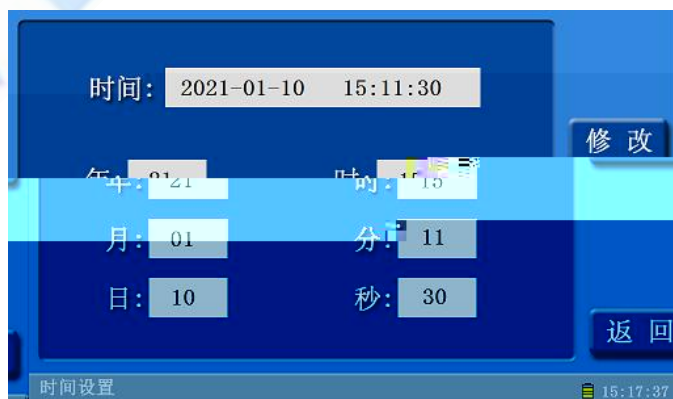


Y

Y Yn

1

CT

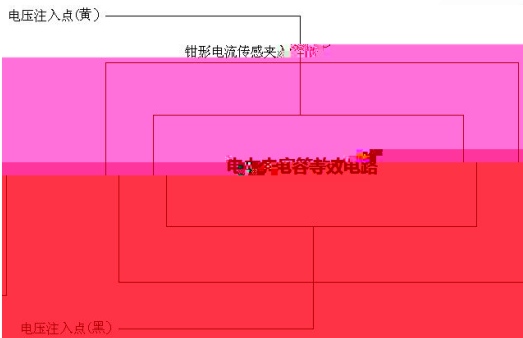


2

1 Y

CT

A,B,C

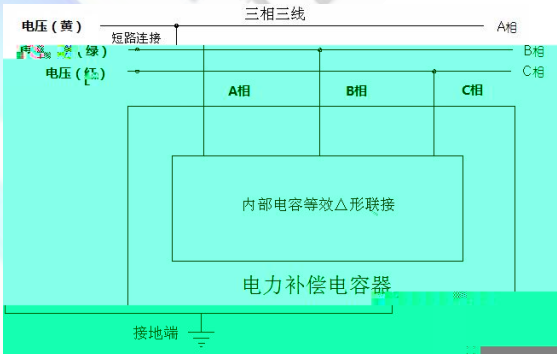

3

Yn

CT

A,B,C



8.1

8.2

8.3

8.4

8.5

8.5

8.6

8.7

1

2

1.



2.

☐ ☐ ☐ ☐

1

2

3

2

24

027-83267669

Ð

